



LS / LS LCD

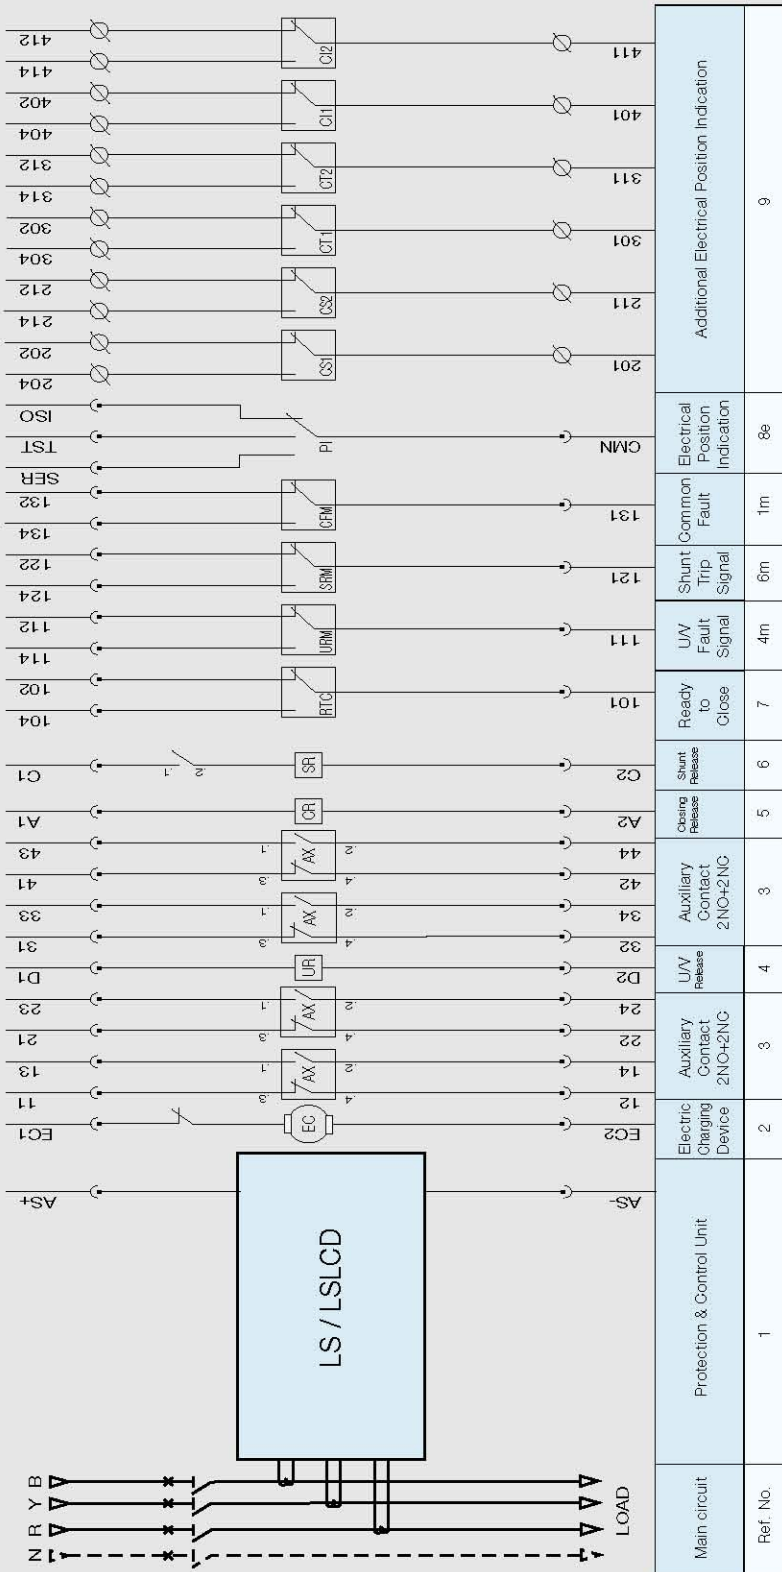


AS+ & AS-: Auxiliary Supply of 24 VDC to be connected for LSLCD only.

LSI / LSI LCD

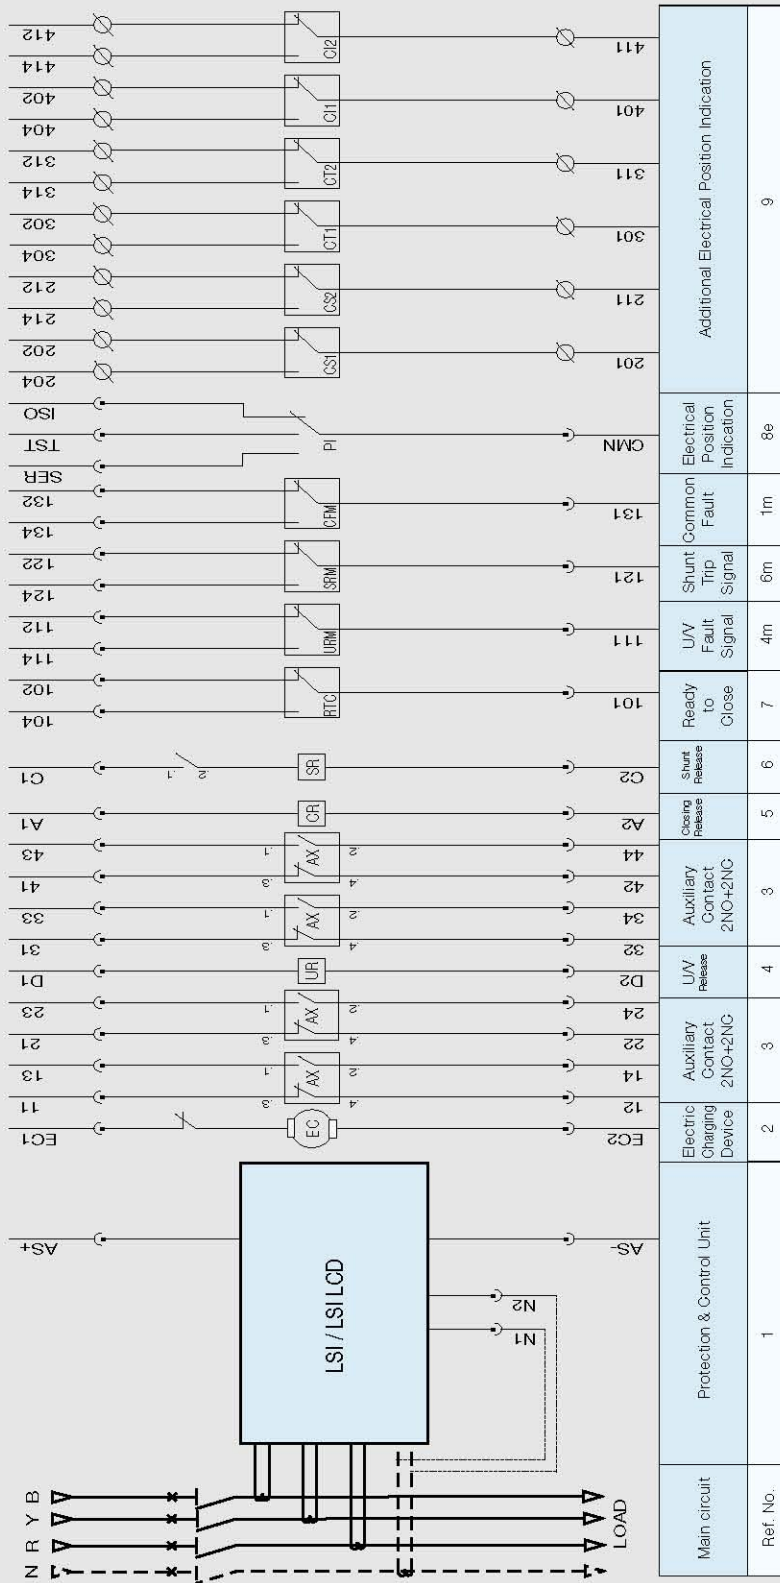

N1, N2: External Neutral CT
 AS+ & AS-: Auxiliary Supply of 24 VDC to be connected for LSI/LCD only

LSIG / LSIG LCD

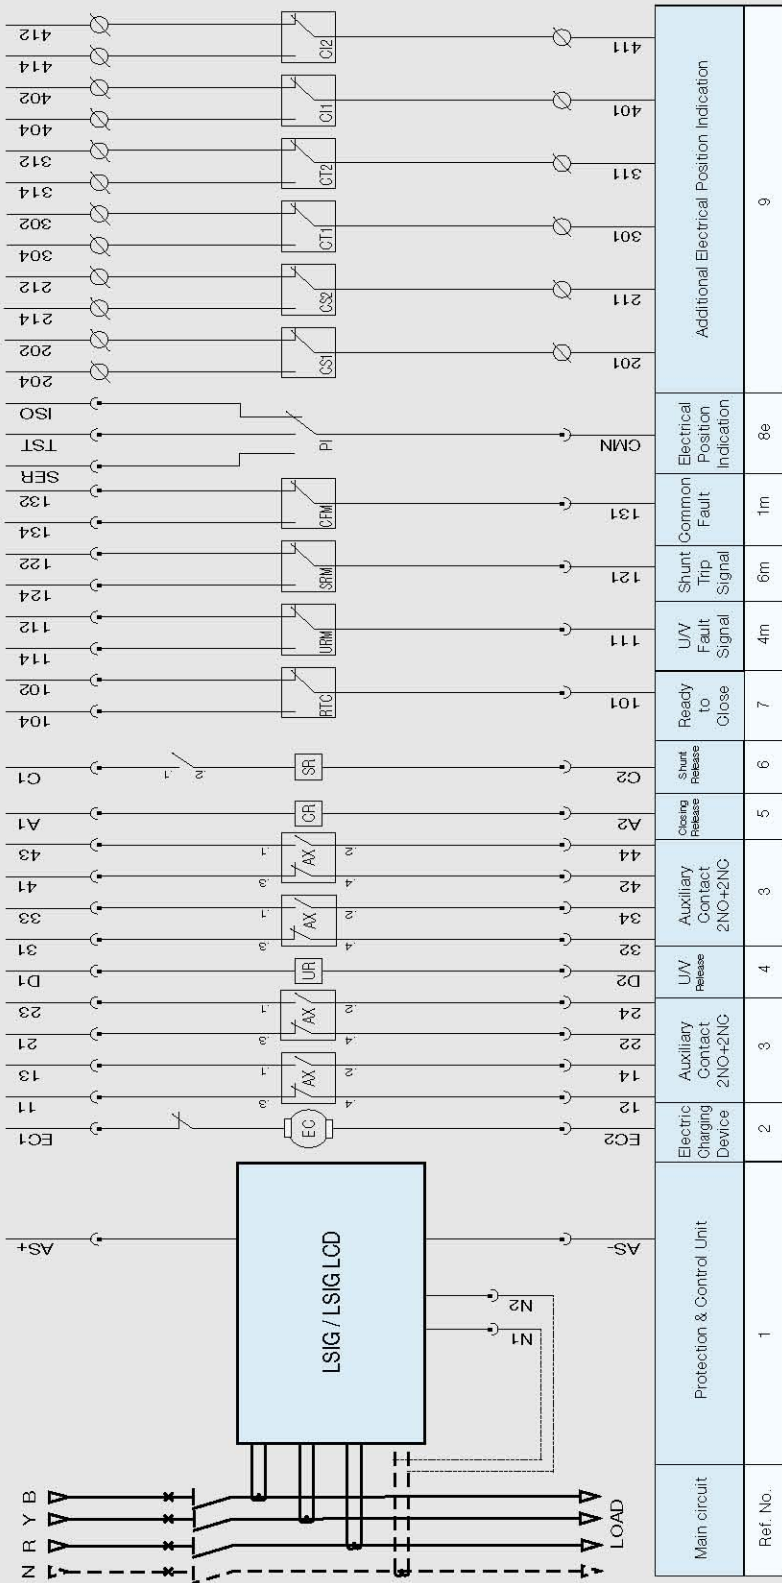

Main circuit	Protection & Control Unit						
Ref. No.	1	2	3	4	5	6	7
	Electric Charging Device	Auxiliary Contact 2NO+2NC	LUV Release	Auxiliary Contact 2NO+2NC	Close Release	Shunt Release	Ready to Close
	EQ2	12, 14, 22, 24	D2, D1	32, 34, 42, 44	A2, A1	G2	101, 102, 104, 111, 112, 121, 122, 131, 132, 134
							CMN
							201, 202, 204, 211, 212, 214, 221, 222, 231, 232, 234, 241, 242, 244, 251, 252, 254, 261, 262, 264, 271, 272, 274, 281, 282, 284, 291, 292, 294, 301, 302, 304, 311, 312, 314, 321, 322, 324, 331, 332, 334, 341, 342, 344, 351, 352, 354, 361, 362, 364, 371, 372, 374, 381, 382, 384, 391, 392, 394, 401, 402, 404, 411, 412
							Additional Electrical Position Indication
							8e
							1m
							6m
							4m
							9

N1, N2: External Neutral CT
 AS+ & AS-: Auxiliary Supply of 24 VDC to be connected for LSIGLCD only